




# Motorola V276 Speaker Replacement

Written By: Kyle Klitzner

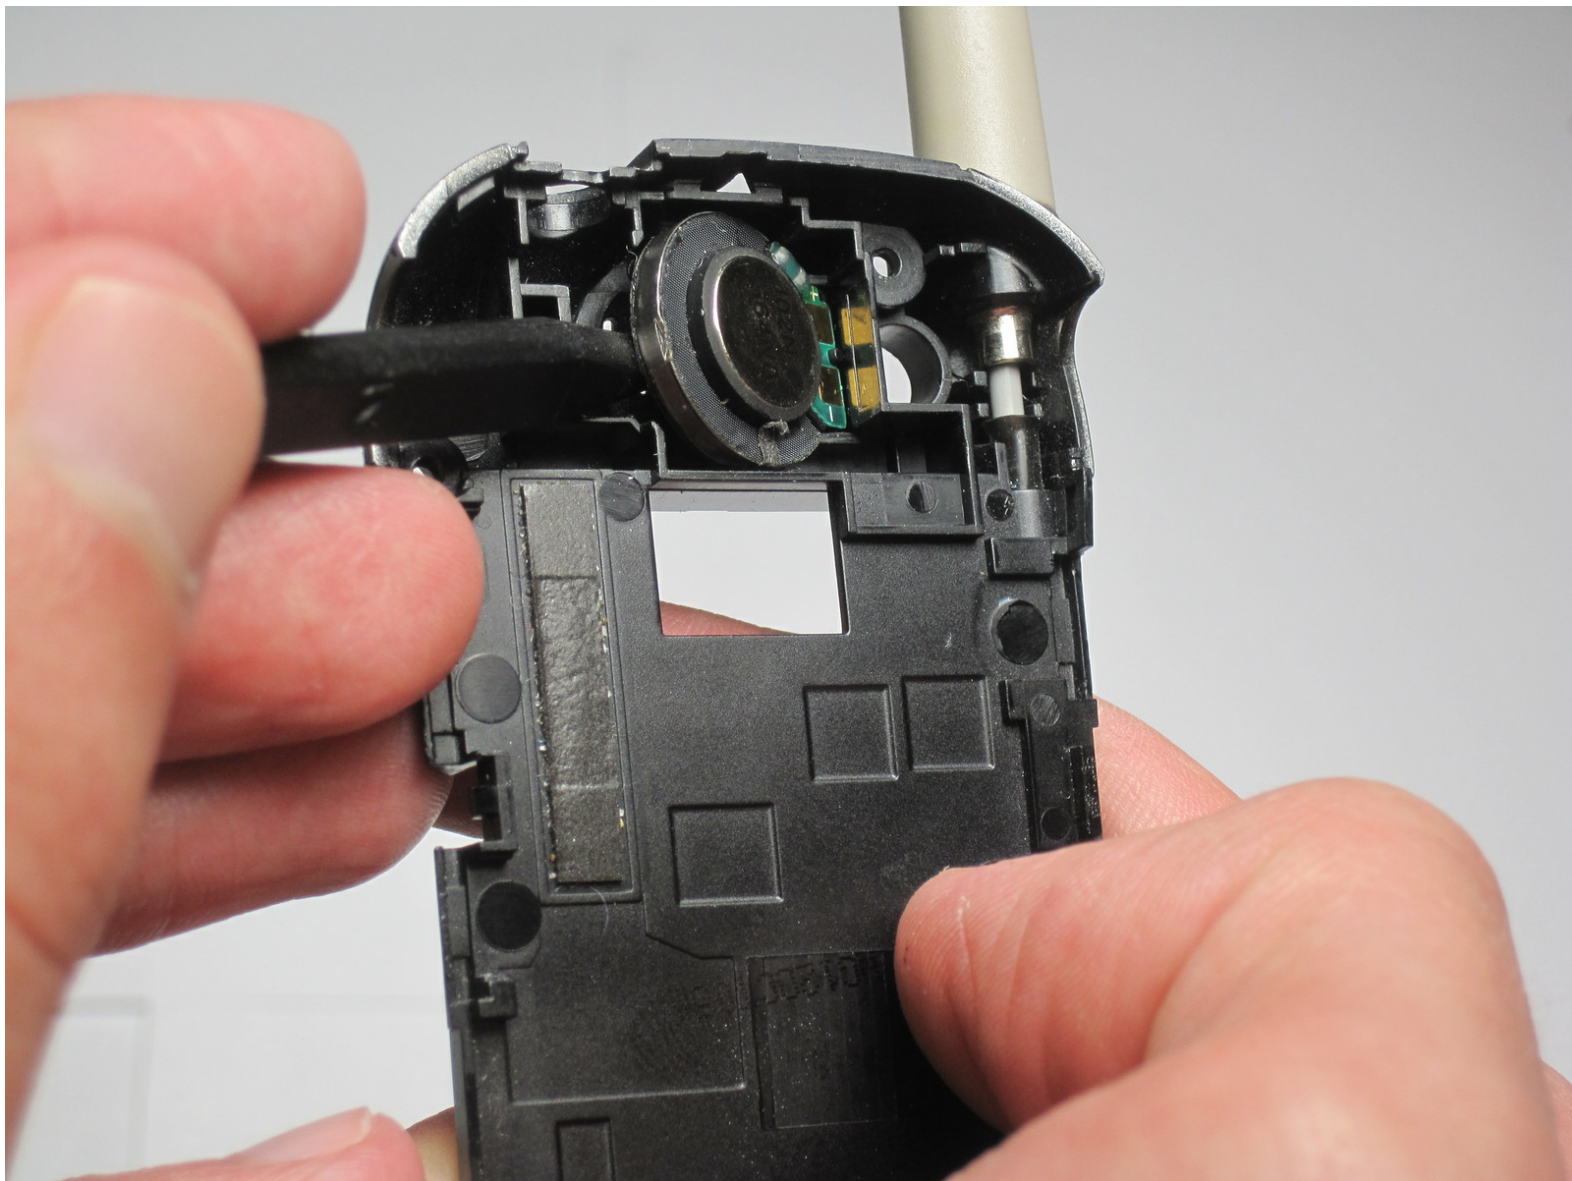

## INTRODUCTION

This is a guide for replacing the back speaker for a Motorola V276 phone.

---

### TOOLS:

- [Spudger](#) (1)
  - [T6 Torx Screwdriver](#) (1)
  - [Tweezers](#) (1)
  - [iFixit Opening Tools](#) (1)
-

## Step 1 — Battery



- Locate the silver button on the back of the phone, near the bottom.
- Press down the button with one hand whilst sliding the back cover of the phone *away* from the antenna.
- The back cover should slide off easily.


## Step 2



- Insert a plastic spudger near one corner of the battery (preferably one furthest from the phone's antenna).
- With a firm grip, gently lift the end of your tool up. The battery should easily raise out of its place.
- Now that the battery is exposed, use your fingers to remove it from the phone.



## Step 3

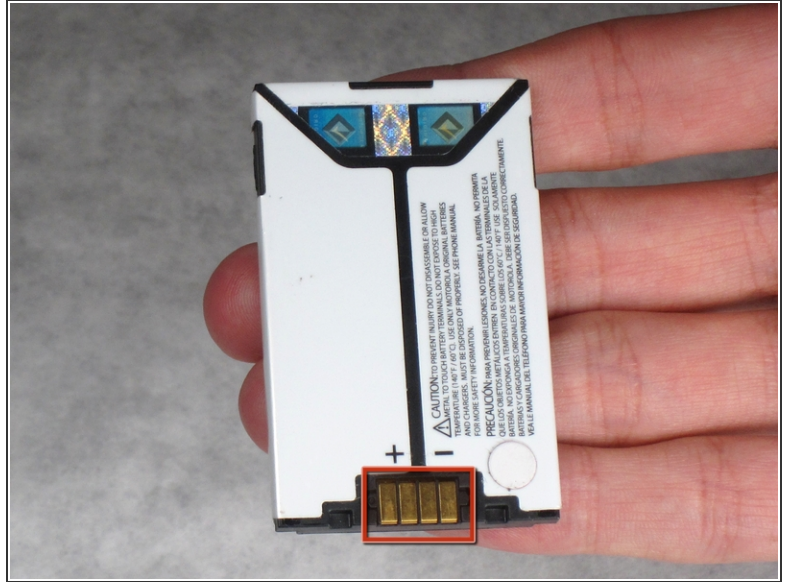

- Note the metal connections on the phone, which are now exposed with the battery removed.
- There are corresponding metal connectors on the replacement battery.
- When you install the battery, be sure both connectors are matched up. Otherwise, your battery will be unable to supply power to your phone.

## Step 4 — Speaker



- Use Spudger to remove rubber plug from upper left corner of the back of the phone

## Step 5



- Using a Hex T6 screwdriver, remove the 4 screws holding the back plate of the phone in place

## Step 6




- Using your hands, pull up on the back plate while pulling on the 3 side tabs to remove the back plate.

⚠ Be careful when removing the back plate; don't put too much stress on the back plate or the plastic may snap





## Step 7

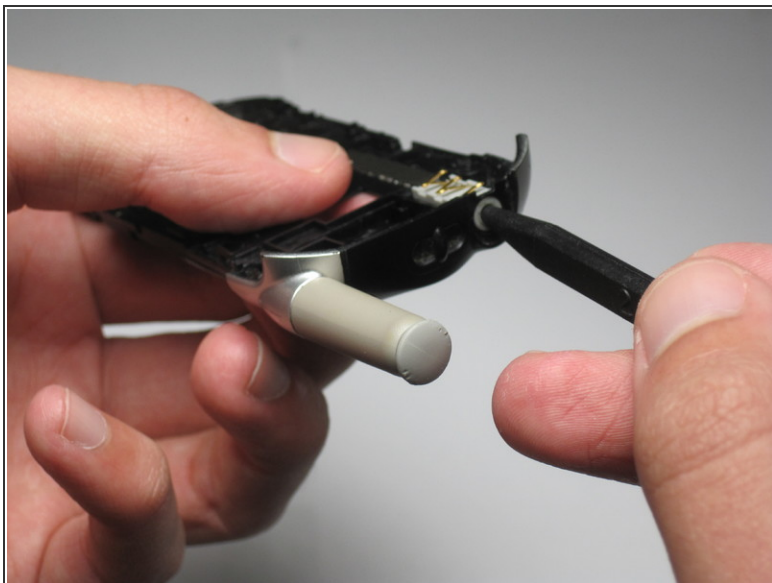


- On the back casing, using a spudger, push into the headphone jack at an upward angle to pop it out

## Step 8

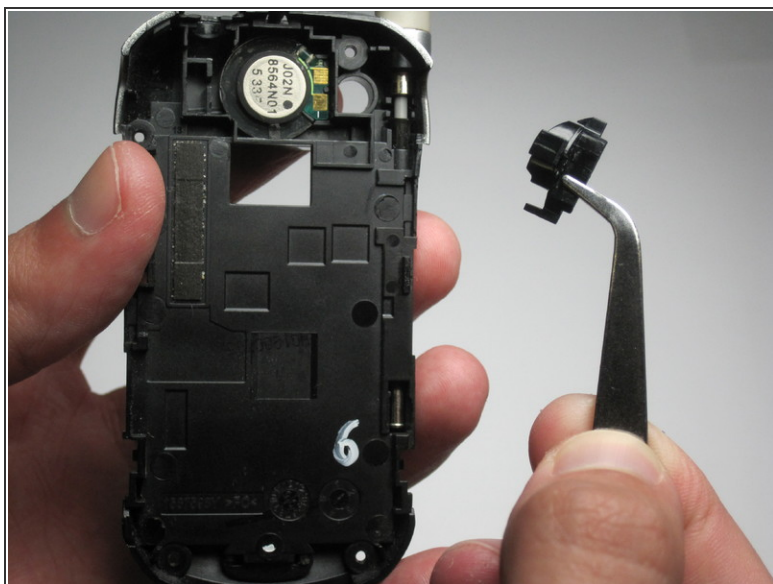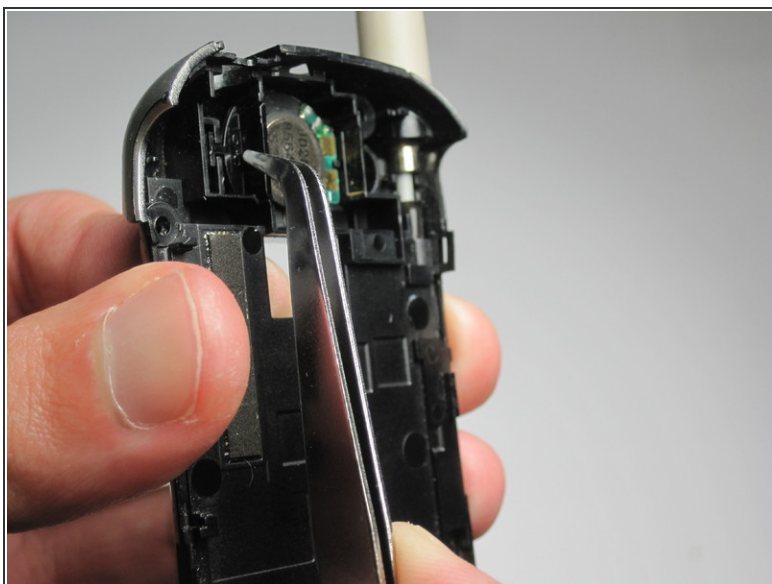

- Using tweezers or your hands, pick out the semicircular plastic border between the speaker and headphone jack

## Step 9

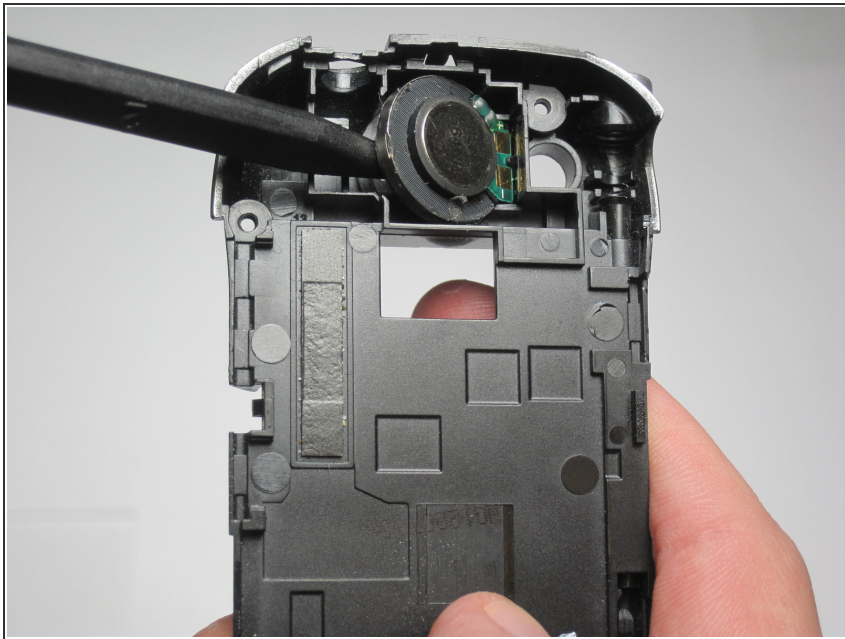

- Using a spudger, remove the speaker

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-13 08:13:59 PM.